


## GLOBAL RX (TOP)

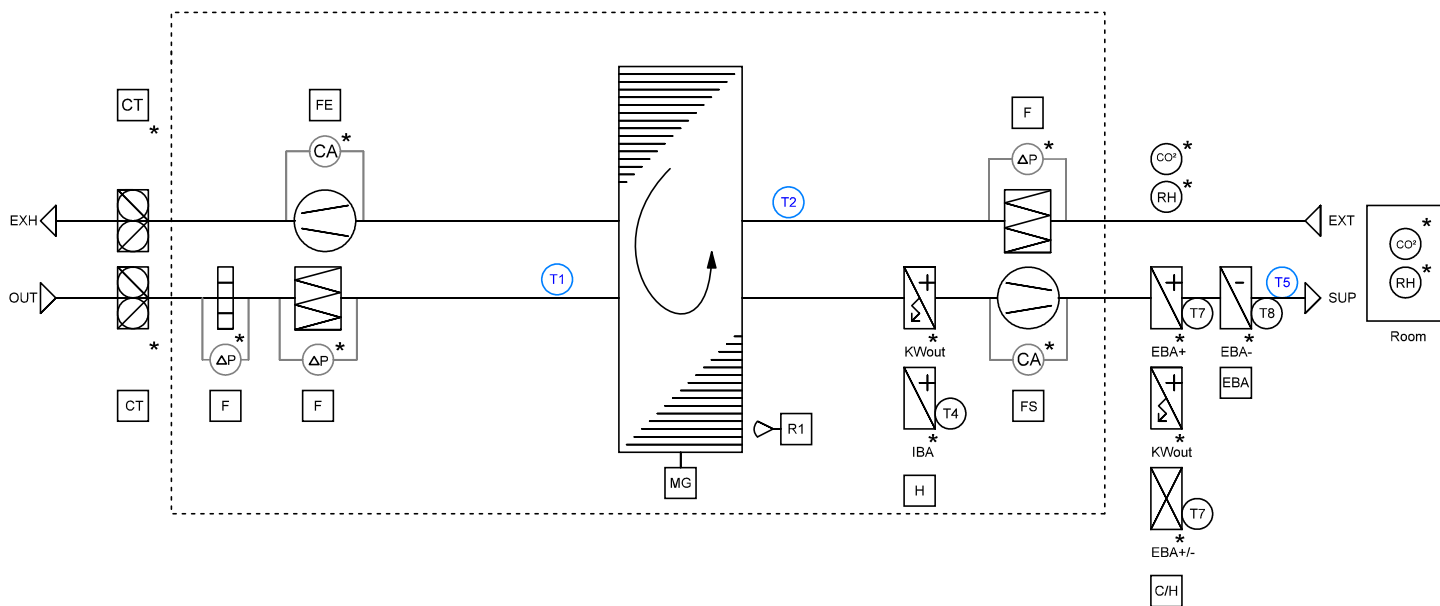

## Component

	Exhaust fan with EC drive
	Supply fan with EC drive
	Motorised damper CT
	Heating

KWout\* : Electrical post-heating coil  
 IBA\* : Internal Water Heating coil  
 3-way valve, Valve actuator

	Filter OUT ePM1 50% (F7) / EXT ePM10 50% (M5)
--	--

	Heating / Cooling IBA+* : Heating coil KW* : Electric heating EBA+/- * : Change over coil
	Cooling EBA-* : Cooling coil

	Outdoor temp.		Exhaust temp.
	Extract temp.		Supply temp. (separately)
	Frost protection temp.		
	Frost protection temp.		
	Frost protection temp.		
	Sensors CO <sup>2</sup> , Humidity		
	Constant airflow kit		
	Pressure switch		
	Pressure sensor		

## Delivery

installed / wired / configured  
 installed / wired / configured  
 installed / wired / configured

installed / wired / configured  
 installed / wired / configured  
 installed / wired / configured  
 separately

installed

separately  
 separately  
 separately  
 separately  
 installed / wired / configured

installed / wired / configured  
 installed / wired / configured  
 separately  
 separately

installed / wired / configured  
 separately  
 installed / wired / configured

\*: Option

## Changes

## Name

## Date

Name

Date

Draw.:

Beckers

03.01.2019

check.:

Pary

Norm:

Subject:

GLOBAL\_Fow chart\_EN.sp17

GLOBAL RX (TOP)